



# Intellego Curing


UV Dosimeters for Curing

DESIGNED FOR **254** NM DEVICES

Intellego Curing provides a visual indication of applied ultraviolet energy during UV Curing processes. Unlike bulky and complex radiometry equipment, Intellego Curing dosimeters are ultra-thin, flexible and also adhesive so they can be used in tight spaces and on dimensional surfaces to provide an accurate dose measurement with ease.

## Key Features

- Thin (0.2 mm), flexible indicators for use in narrow spaces
- Intended for use in curing with UV-C light at 254 nm
- Indicator temperature tolerance: 15-70° C | 59-158° F
- Designed with adhesive backing for placement on any object or surface
- 3-year shelf life
- Single use only
- Packaged in resealable mylar pouches
- Private label and customization available
- Polypropylene material is recyclable
- Store indicators in original packaging at 0-40° C | 32-104° F
- Keep away from direct sunlight

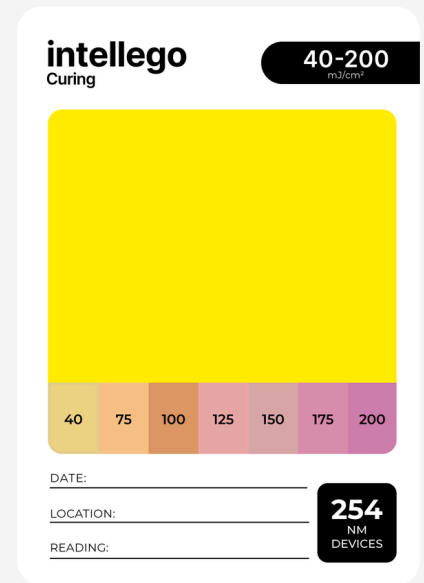

UV254-DC-40200

### How to use:

- To use, place an indicator on any surface or material that will be cured with UV-C devices (254 nm).
- Make sure the yellow indicator area faces the UV light source.
- After exposure, use the color reference to determine if the desired dose of UV energy (mJ/cm<sup>2</sup>) was achieved.

**SKU**  
UV254-DC-40200

**UV RANGE**  
40 - 200 mJ/cm<sup>2</sup>

**DESCRIPTION**  
2.5" x 3.5" dosimeter card

**CONTENTS**  
28 / pouch




Intellego Curing dosimeters are designed to provide a visual indication of applied UV energy. Store at room temperature and away from direct sunlight. **Do not reuse.** Intellego Curing dosimeters are designed and manufactured in Sweden by Intellego Technologies AB.




For more information, please scan the QR code or visit [Intellego-technologies.com](http://Intellego-technologies.com)

Intellego Curing provides a visual indication of applied ultraviolet energy during UV Curing processes. Unlike bulky and complex radiometry equipment, Intellego Curing dosimeters are ultra-thin, flexible and also adhesive so they can be used in tight spaces and on dimensional surfaces to provide an accurate dose measurement with ease.

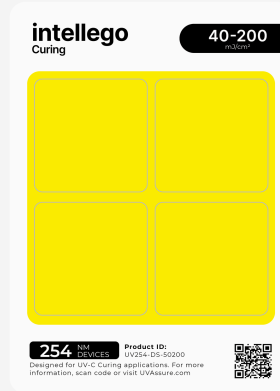

UV254-DS-40200

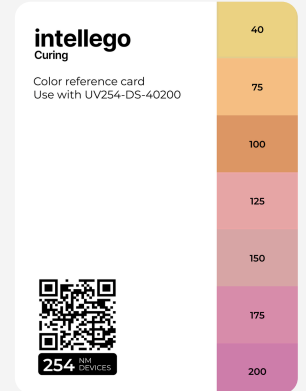

UV254-DS-40200 Color Reference Card

### Key Features

- Thin (0.2 mm), flexible indicators for use in narrow spaces
- Intended for use in curing with UV-C light at 254 nm
- Indicator temperature tolerance: 15-70° C | 59-158° F
- Designed with adhesive backing for placement on any object or surface
- 3-year shelf life
- Single use only
- Packaged in resealable mylar pouches
- Private label and customization available
- Polypropylene material is recyclable
- Store indicators in original packaging at 0-40° C | 32-104° F
- Keep away from direct sunlight

#### How to use:

- To use, place an indicator on any surface or material that will cured with UV-C devices (254 nm).
- Make sure the yellow indicator area faces the UV light source.
- After exposure, use the color reference to determine if the desired dose of UV energy (mJ/cm<sup>2</sup>) was achieved.

SKU	UV RANGE	DESCRIPTION	CONTENTS
UV254-DS-40200	40 - 200 mJ/cm <sup>2</sup>	1" adhesive stickers (x4) on card with color reference card	28 / pouch





# Intellego Curing


UV Dosimeters for Curing

DESIGNED FOR **254** NM DEVICES

Intellego Curing provides a visual indication of applied ultraviolet energy during UV Curing processes. Unlike bulky and complex radiometry equipment, Intellego Curing dosimeters are ultra-thin, flexible and also adhesive so they can be used in tight spaces and on dimensional surfaces to provide an accurate dose measurement with ease.

## Key Features

- Thin (0.2 mm), flexible indicators for use in narrow spaces
- Intended for use in curing with UV-C light at 254 nm
- Indicator temperature tolerance: 15-70° C | 59-158° F
- Designed with adhesive backing for placement on any object or surface
- 3-year shelf life
- Single use only
- Packaged in resealable mylar pouches
- Private label and customization available
- Polypropylene material is recyclable
- Store indicators in original packaging at 0-40° C | 32-104° F
- Keep away from direct sunlight

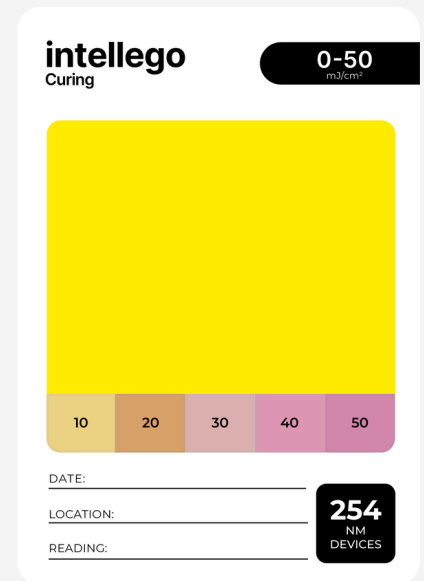

UV254-DC-050

## How to use:

- To use, place an indicator on any surface or material that will be cured with UV-C devices (254 nm).
- Make sure the yellow indicator area faces the UV light source.
- After exposure, use the color reference to determine if the desired dose of UV energy (mJ/cm<sup>2</sup>) was achieved.

SKU	UV RANGE	DESCRIPTION	CONTENTS
UV254-DC-050	0 - 50 mJ/cm <sup>2</sup>	2.5" x 3.5" dosimeter card	28 / pouch



Intellego Curing dosimeters are designed to provide a visual indication of applied UV energy. Store at room temperature and away from direct sunlight. **Do not reuse.** Intellego Curing dosimeters are designed and manufactured in Sweden by Intellego Technologies AB.



For more information, please scan the QR code or visit [Intellego-technologies.com](https://intellego-technologies.com)




# Intellego Curing


UV Dosimeters for Curing

DESIGNED FOR **254** NM DEVICES

Intellego Curing provides a visual indication of applied ultraviolet energy during UV Curing processes. Unlike bulky and complex radiometry equipment, Intellego Curing dosimeters are ultra-thin, flexible and also adhesive so they can be used in tight spaces and on dimensional surfaces to provide an accurate dose measurement with ease.

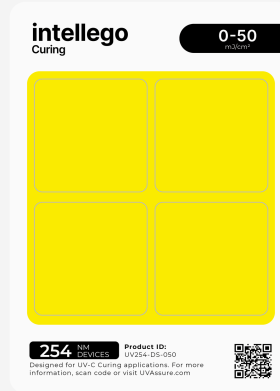

UV254-DS-050

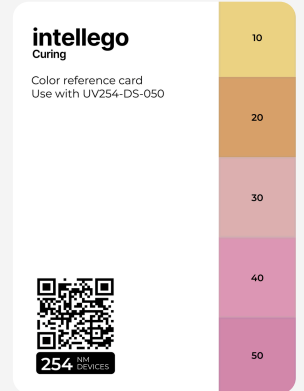

UV254-DS-050 Color Reference Card

## Key Features

- Thin (0.2 mm), flexible indicators for use in narrow spaces
- Intended for use in curing with UV-C light at 254 nm
- Indicator temperature tolerance: 15-70° C | 59-158° F
- Designed with adhesive backing for placement on any object or surface
- 3-year shelf life
- Single use only
- Packaged in resealable mylar pouches
- Private label and customization available
- Polypropylene material is recyclable
- Store indicators in original packaging at 0-40° C | 32-104° F
- Keep away from direct sunlight

### How to use:

- To use, place an indicator on any surface or material that will be cured with UV-C devices (254 nm).
- Make sure the yellow indicator area faces the UV light source.
- After exposure, use the color reference to determine if the desired dose of UV energy (mJ/cm<sup>2</sup>) was achieved.

SKU	UV RANGE	DESCRIPTION	CONTENTS
UV254-DS-050	0 - 50 mJ/cm <sup>2</sup>	1" adhesive stickers (x4) on card with color reference card	28 / pouch



Intellego Curing dosimeters are designed to provide a visual indication of applied UV energy. Store at room temperature and away from direct sunlight. **Do not reuse.** Intellego Curing dosimeters are designed and manufactured in Sweden by Intellego Technologies AB.



For more information, please scan the QR code or visit [Intellego-technologies.com](http://Intellego-technologies.com)



# Intellego Curing


UV Dosimeters for Curing

DESIGNED FOR **254** NM DEVICES

Intellego Curing provides a visual indication of applied ultraviolet energy during UV Curing processes. Unlike bulky and complex radiometry equipment, Intellego Curing dosimeters are ultra-thin, flexible and also adhesive so they can be used in tight spaces and on dimensional surfaces to provide an accurate dose measurement with ease.

## Key Features

- Thin (0.2 mm), flexible indicators for use in narrow spaces
- Intended for use in curing with UV-C light at 254 nm
- Indicator temperature tolerance: 15-70° C | 59-158° F
- Designed with adhesive backing for placement on any object or surface
- 3-year shelf life
- Single use only
- Packaged in resealable mylar pouches
- Private label and customization available
- Polypropylene material is recyclable
- Store indicators in original packaging at 0-40° C | 32-104° F
- Keep away from direct sunlight

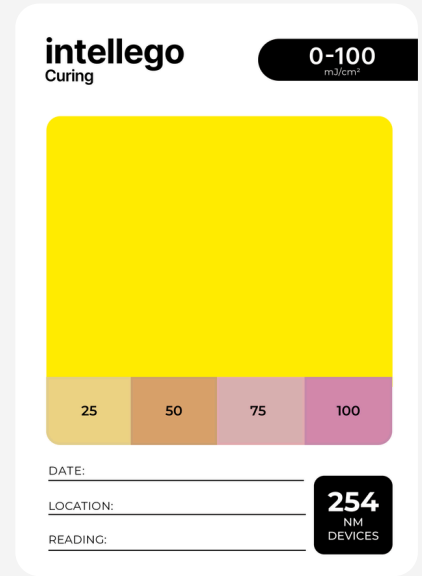

UV254-DC-25100

## How to use:

- To use, place an indicator on any surface or material that will be cured with UV-C devices (254 nm).
- Make sure the yellow indicator area faces the UV light source.
- After exposure, use the color reference to determine if the desired dose of UV energy (mJ/cm<sup>2</sup>) was achieved.

### SKU

UV254-DC-25100

### UV RANGE

0-100 mJ/cm<sup>2</sup>

### DESCRIPTION

2.5" x 3.5" dosimeter card

### CONTENTS

28 / pouch




Intellego Curing dosimeters are designed to provide a visual indication of applied UV energy. Store at room temperature and away from direct sunlight. **Do not reuse.** Intellego Curing dosimeters are designed and manufactured in Sweden by Intellego Technologies AB.




For more information, please scan the QR code or visit [Intellego-technologies.com](http://Intellego-technologies.com)

Intellego Curing provides a visual indication of applied ultraviolet energy during UV Curing processes. Unlike bulky and complex radiometry equipment, Intellego Curing dosimeters are ultra-thin, flexible and also adhesive so they can be used in tight spaces and on dimensional surfaces to provide an accurate dose measurement with ease.

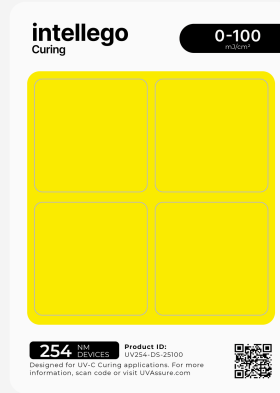

UV254-DS-25100

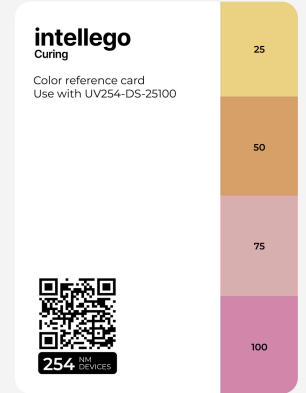

UV254-DS-25100 Color Reference Card

### Key Features

- Thin (0.2 mm), flexible indicators for use in narrow spaces
- Intended for use in curing with UV-C light at 254 nm
- Indicator temperature tolerance: 15-70° C | 59-158° F
- Designed with adhesive backing for placement on any object or surface
- 3-year shelf life
- Single use only
- Packaged in resealable mylar pouches
- Private label and customization available
- Polypropylene material is recyclable
- Store indicators in original packaging at 0-40° C | 32-104° F
- Keep away from direct sunlight

#### How to use:

- To use, place an indicator on any surface or material that will be cured with UV-C devices (254 nm).
- Make sure the yellow indicator area faces the UV light source.
- After exposure, use the color reference to determine if the desired dose of UV energy (mJ/cm<sup>2</sup>) was achieved.

SKU	UV RANGE	DESCRIPTION	CONTENTS
UV254-DS-25100	0-100 mJ/cm <sup>2</sup>	1" adhesive stickers (x4) on card with color reference card	28 / pouch

